

The Miele Company, founded in 1899, has always been synonymous with quality and innovation. Our goal of "Immer Besser", which translates as "Forever Better", has been the guiding principle in creating a brand which is identified with unsurpassed product quality worldwide.

Our new generation of Miele appliances uses professional technology that enables you to give free rein to your culinary creativity and helps you to relax and enjoy the experience of cooking.

Design your dream kitchen – a kitchen that meets your every need, where the outward appearance is just as important as the experience of using it. This is the principle on which our new built-in kitchen appliances are based. With world class designers and engineers, Miele are proud to showcase the 2013 range of new products that perfectly complement one another in terms of form, function and materials. This new generation of appliances takes design consistency to a completely new level. Discover your favourites on the following pages.

For further information on Miele appliances please go to our website or contact Miele.

Tel - 0845 365 0555

Email - info@miele.co.uk

Web - www.miele.co.uk

# Contents

ContourLine Clean Steel	
ContourLine Controls	
Design Integration	6-
Features	8-
Cooking	
Ovens	1
Microwave Ovens	1
Microwave Combination Ovens	- 1
Steam Ovens	1:
Steam Combination Ovens	1:
Coffee Machines	1:
Warming Drawers	1
Hobs	
Induction	14-1
Ceramic	1:
Gas	1
Gas on Glass	1
CombiSets	1
Cooker Hoods	
Slimline	18
Integrated	18
Wall Décor	19-2
Ceiling Hood	2
Island Décor	2
Refrigeration	
Fridges	2
Freezers	2
Fridge Freezers	2
Wine Conditioning Units	23
Dishwashers	
Semi Integrated	2
Fully Integrated	2
Laundry	21



# ContourLine Clean Steel



# ContourLine Controls

# Premium appliances with SensorTronic controls

A five-line TFT display with sensor controls to the side presents all the menu options clearly. The key feature is easy navigation.



# Reference II appliances with DirectControls

The dial on the left is turned to select the operating mode. Settings in the four-line text display, such as temperatures and cooking times, are chosen with the right-hand dial and confirmed using the sensor controls.



# Discovery and Reference I appliances with EasyControls

The control elements are designed in a similar way to DirectControl, but with status information, such as temperature and time settings, appearing on a large seven-segment LC display.





# Do

# **Vertical 2-niche array**

The bottom product should always be a 60 cm oven for ergonomic reasons.



45 cm tall appliance + 60 cm oven

35 cm tall appliance + 60 cm oven

# 4-niche 'matrix' array

For ergonomic reasons, the coffee machine should be fitted in the top right and the steam oven in the top left niche, with the option of 2 warming drawers fitted in the bottom niche.



45 cm tall appliance + 60 cm tall appliance + 14 cm warming drawer 45 cm coffee machine + 60 cm tall appliance + 14 cm warming drawer

# 4-niche 'T' array

For aesthetic reasons, the centre appliance on the top row should be the coffee machine. A warming drawer should not feature under the 45 cm units due to the height difference compared with the oven fascia. Optionally, a warming drawer can be fitted below the 60 cm oven.



45 cm tall appliance

45 cm tall coffee machine + 60 cm oven 45 cm tall appliance

# **Vertical 3-niche array**

For aesthetic reasons, the coffee machine should be fitted in the top niche.



# Horizontal 3-niche 'panoramic' array

For aesthetic reasons, the centre appliance should be the coffee machine. A warming drawer can also be installed underneath each main appliance.



45 cm tall appliance + 14 cm warming drawer 45 cm tall coffee machine + 14 cm warming drawer 45 cm tall appliance + 14 cm warming drawer

# 5-niche array

A 60 cm standard oven can also be the centre piece, with a warming drawer underneath each of the 45 cm units.



45 cm tall appliance + 14 cm warming drawer 60 cm tall oven

45 cm tall appliance + 14 cm warming drawer

# Don't

# 35 cm tall appliances

35 cm tall appliances should not be fitted horizontally with other built-in appliances. They should only be installed in vertical arrays.



# 35 cm tall appliances with 10 cm high warming/system drawers

The 10 cm high drawer and the 10 cm high trim was designed as a solution for the replacement market. They enable 35 cm tall appliances to be fitted in a 45 cm niche. 35 cm tall appliances should only be fitted in a 35 cm niche above another built-in appliance such as an oven.



# Horizontal 3-niche 'panoramic' array

For aesthetic reasons, the centre appliance should be the coffee machine. A warming drawer can also be installed underneath each main appliance.



45 cm tall coffee machine

45 cm tall appliance


45 cm tall appliance

#### 60 cm wide fascia dishwashers

Due to technical design, the control panel on dishwashers is wider than the control panel on built-in cooking appliances. They can be planned in horizontal combinations if required (e.g. next to an oven), but should not be used in vertical combinations.



# Niche Considerations

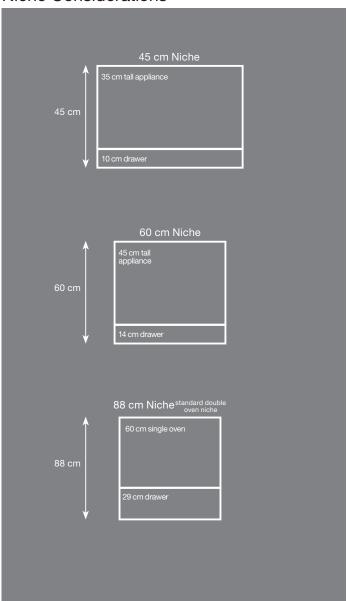

# Ovens, Microwave & Microwave Combination Ovens



#### Moisture Plus

By adding a burst of steam to the cooking process at just the right time, the Moisture Plus function will help you achieve outstanding results when baking bread and roasting meats, for example.



#### Combination programmes

Microwave Combination programmes use a standard cooking function together with microwave energy to cook and reheat food quickly, with even browning results.



#### Pyrolytic cleaning

For effortless maintenance, this self-cleaning programme reduces food residues to ash which can be simply wiped away.



With the new PyroFit oven accessories, manual cleaning of the side runners, racks and FlexiClips is now a thing of the past. They can simply be left in the oven during the pyrolytic cleaning process.



#### Wireless food probe

Individual and accurate roasting of meat, fish and poultry by measuring the core temperature.



#### **Automatic programmes**

With Miele's Automatic programmes there is no need to set the cooking function, temperature or duration so you can be sure of perfect results every time for a wide variety of food, including national dishes such as Shepherd's pie and Beef Wellington.



#### Popcorn button

Perfect popcorn at the press of a button. The Popcorn button on microwave and microwave combination ovens is suitable for preparing most types of popcorn available from supermarkets.

# Steam & Steam Combination Ovens



#### Mono steam

The Mono steam system is ideal for small oven compartments as steam is generated in the water container outside the oven cavity and then injected when it is needed.



For larger steam ovens the Multi steam system with a new, powerful steam generator enables shorter heat-up times. Steam is distributed quickly and evenly via several inlets which on some models are also LED illuminated.



#### Menu cooking

Cook up to 3 different foods at the same time. Temperature, cooking time and sequence are automatically set.



#### Lift-up fascia

Motorised lift-up control panel. Conceals water container, condensate container and food probe.



#### **Automatic programmes**

Cook with confidence using the wide range of Automatic programmes for dishes such as Christmas pudding and Beef casserole.



#### Plumbed-in connection

For added convenience water intake and drainage functions are automatic without the need to fill the water container or empty after use.



#### **Combination cooking**

You can enjoy new freedom in cooking by combining steam cooking with conventional oven functions, such as Fan plus or the grill, for guite simply unparalleled results.

#### Coffee Machines



#### **Built-In Nespresso®**

Built-In Nespresso® capsule machine - worldwide exclusive.



#### Front-opening door

Patented front-opening door for easy access to coffee, water and waste container.



#### OneTouch for Two

Just press 'OneTouch for Two' to prepare two delicious cups of espresso, coffee, cappuccino or latte macchiato automatically and at the same time.



#### EasyClick glass milk system

The new and unique EasyClick milk system with high-quality glass milk flask simply clicks into place at the front of the coffee machine. It is also very easy to remove without the need to open the door.



#### **CupSensor**

The CupSensor detects the rim of the cup and automatically adjusts the spout height into the correct position for the perfect cup of coffee.

#### Hobs & CombiSets



#### DirectSelection / DirectSelection Plus

Intuitive and quick selection of power settings and durations.



#### Twin booster

Twin booster (induction only) - concentrated power for faster cooking.



#### ExtraSpeed

The fastest highlight hob in the world.



#### Con@ctivity

Hob to cooker hood communication for ultimate controllability. The cooker hood will switch on automatically when the hob is switched on.



Gas supply automatically shuts off when flame is extinguished, e.g. by a draught.



#### Gas Stop & Restart

Re-ignition when flame is unintentionally extinguished.



#### ComfortClean pot rests

Easy to clean, dishwasher proof pot rests.



The WaterBoost function has a high 5.0 kW output for superfast boiling and features a dual circuit to suit multiple pan sizes.



For flexible cooking options, PowerFlex combines two separate cooking zones into one - ideal for those large casserole dishes.

# Warming Drawers



#### Touch controls

Touch controls for total convenience. Recommended temperatures for cups, plates and food.



#### SoftClose

The SoftClose mechanism guides the drawer gently and softly into position, protecting the contents.



Timer for complete peace of mind.



#### Sous@# SousChef

An appliance with temperature control and fan heating which can be used for low temperature cooking as well as a food and plate

# Cooker Hoods



#### Con@ctivity

Hob to cooker hood communication for ultimate controllability. The Cooker hood will switch on automatically when the hob is switched on.



#### Filter indicator

Charcoal filters

An LED will remind you when to clean the grease filters or to replace the charcoal filters.

In addition to grease filters, recirculation mode cooker hoods have

active charcoal filters which help bind and neutralise unpleasant



#### Run-on function

Run-on for 5 or 15 minutes with auto switch-off to clear the air after cookina.



#### Special build

Cooker hoods that can be bespoke handmade, including special heights and up to 200 RAL colours.

# Refrigeration including Wine



#### **Active AirClean filter**

Active charcoal filter for odour free interior.



#### PerfectFresh

Food stays fresh for up to 3 times longer than in a conventional refrigerator. Better taste, better quality, less waste.



#### PerfectFresh Pro

The PerfectFresh Pro system with even more controlled humidity and temperature allows food to stay fresh for up to 4 times as long as in a conventional refrigerator.



#### Dynamic cooling

Air circulation for even cabinet temperatures and fast cool down times.



#### SoftClose

odours.

The SoftClose door mechanism is designed to stop the door at the last moment leaving it to gently close on its own. No need to worry about bottles and jars falling over.



#### FlexiLiaht

FlexiLight LED glass edge lighting provides optimum, elegant and glare-free illumination inside the appliance.



#### Mylce Maker

Miele's Mylce Maker has the advantage of a water tank, so there is no need to plumb the appliance into the water supply.



#### Frost free

Frost free refrigeration means there is no build-up of frost and ice on the food or in the appliance. This eliminates the need to defrost the appliance.



#### SommelierSet

The SommelierSet includes an accessory storage box, glass holder and 2 decanting racks so you can decant wine in the unit. Any unfinished opened bottles can be stored in perfect conditions in the ConvinoBox.

# **Dishwashers**



#### 3D Cutlery tray

The intelligent 3D Cutlery tray can be varied in width, depth and height to accommodate every load perfectly.



#### BrilliantLight

Perfect lighting for easier loading.



#### Comfort basket design Versatile lower basket and innovations in the upper basket.



The dishwasher door opens automatically at the end of the programme for perfect drying.



#### In door salt

Patented salt container located in the door for easy salt replenishment.



#### Perfect GlassCare system

Automatic softening of rinse water for total glass care.



#### SoftClose

Easy opening and soft closing doors throughout the range can be adjusted to perfectly balance the weight of furniture doors.



#### Intensive lower basket

This option boosts the cleaning performance in the lower basket. Ideal for heavily soiled pots and pans whilst giving a gentle clean to items in the top basket.



As little as 7 litres per load.



#### 38 dB

So quiet you can hardly hear it.

# Laundry



#### Honeycomb drum

Patented Miele Honeycomb drum. Optimum garment care.



Automatic rinsing of the detergent drawer during every programme.



#### Extra Quiet

Using a special drum rhythm and automatic rinse hold, the Miele washing machine is even quieter on selected programmes.



There are 22 stain options to choose from and for some stains a tip about pre-treating will appear in the display.



The PerfectDrv system monitors the residual moisture in the load and adjusts the drving time accordingly.

#### Reference I Reference II Discovery Premium Ovens H 2361 B H 6160 B H 6360 BP H 6560 BP • W x H\*: 60 x 60 cm • Capacity: 76 litres Capacity: 76 litres • Capacity: 76 litres • Capacity: 76 litres . Colour: clst fascia Colour: clst • Colour: clst · Colour: clst EasyControls EasyControls DirectControls SensorTronic controls • 7 cooking functions 8 cooking functions including Moisture Plus • 9 cooking functions including Moisture Plus 11 cooking functions including Moisture Plus Pyrolytic cleaning including PyroFit accessories Pyrolytic cleaning including PyroFit accessories Automatic programmes Automatic programmes Food probe H 6160 BP H 2361 BP PYROLYSI: As **H 2361 B**, plus: As **H 6160 B**, plus: Pyrolytic cleaning Pyrolytic cleaning including PyroFit accessories

<sup>\*</sup> Please refer to the Miele Built-in appliances brochure or www.miele.co.uk for full specifications and detailed building-in drawings and installation instructions.

#### Freestanding 50 cm 60 cm Microwave Ovens M 6012 M 6022 SC M 6032 SC Freestanding • W x H\*: 50 x 45 cm • W x H\*: 60 x 45 cm • Capacity: 26 litres Capacity: 17 litres Capacity: 17 litres • Colour: clst • Colour: clst Colour: clst Dial controls Dial controls Dial controls Microwave power: 80 - 900 W Microwave power: 80 - 800 W Microwave power: 80 - 800 W Grill 800 W Grill 800 W Grill 800 W Quick microwave button Quick microwave button Quick microwave button Automatic programmes Automatic programmes Automatic programmes Reference I Reference II Premium Microwave Combination Ovens H 6100 BM H 6300 BM H 6500 BM 巨月 州 市は • W x H\*: 60 x 45 cm • W x H\*: 60 x 45 cm • W x H\*: 60 x 45 cm • Capacity: 43 litres • Capacity: 43 litres • Capacity: 43 litres Colour: clst • Colour: clst · Colour: clst DirectControls SensorTronic controls EasyControls Microwave power: 80 - 1000 W Microwave power: 80 - 1000 W Microwave power: 80 - 1000 W 6 oven functions 7 oven functions 9 oven functions • 2 microwave combi programmes • 4 microwave combi programmes • 4 microwave combi programmes Quick microwave button Quick microwave button Quick microwave button Popcorn button Popcorn button Popcorn button Automatic programmes Automatic programmes Food probe

#### Reference I Reference II Freestanding Steam Ovens **DG 6010 DG 6100 DG** 6300 Freestanding • W x H\*: 60 x 45 cm • W x H\*: 60 x 45 cm • Capacity: 24 litres • Capacity: 38 litres • Capacity: 38 litres • Colour: ob · Colour: clst Colour: clst EasySensor EasySensor DirectControls Steam cooking by time & temperature · Steam cooking by time & temperature Steam cooking Multi steam with LED illumination Mono steam Multi steam Automatic programmes Automatic programmes User programmes Reference II Premium Steam Combination Ovens **DGC 6300 DGC 6500 XL** • W x H\*: 60 x 45 cm • W x H\*: 60 x 45 cm • Capacity: 33 litres • Capacity: 48 litres Colour: clst • Colour: clst DirectControls SensorTronic controls Mono steam Multi steam Steam cooking Steam cooking Combination cooking Combination cooking Automatic programmes • 9 oven functions including 3 grill functions User programmes Automatic programmes User programmes Menu cooking Motorised fascia panel Food probe

#### Reference II Touch Freestanding Nespresso® Coffee Machines **CM 5100 CVA 6431 CVA 6401** . Colours: black, white W x H\*: 60 x 35 cm W x H\*: 60 x 45 cm Cup heating Colour: clst Colour: clst Bean-to-Cup DirectSensor controls DirectSensor controls Nespresso® capsule system Auto coffee, espresso Bean-to-Cup · Cappuccino, latte macchiato · Auto coffee, espresso • Auto coffee, espresso Milk froth, hot milk Cappuccino, latte macchiato Auto cappuccino, latte macchiato Milk froth, hot milk · Auto milk froth, hot milk, hot water 10 user programmes • 10 user programmes Glass cappuccinatore EasyClick glass milk system Height adjustable spout 10 cm 14 cm 14 cm 29 cm Warming Drawers ESW 6129 SousChef **EGW 6210 ESW 6214 ESW 6114** • W x H\*: 60 x 10 cm • W x H\*: 60 x 14 cm As **ESW 6214**, plus: • W x H\*: 60 x 29 cm Colour: clst · Colour: clst Colour: clst . Colour: clst fascia Crockery warming only Food and crockery warming drawer Broad lower trim Food and crockery warming drawer Temperature 30°C to 50°C Temperature 40°C to 85°C • Temperature 40°C to 85°C · Recommended temps for cups, crockery warming · Recommended temps for cups, crockery, · Recommended temps for cups, crockery, Capacity 15 kg food warming food warming Radiant heat Capacity 25 kg Capacity 25 kg Push to open Fan heat for low temperature cooking Fan heat for low temperature cooking Narrow lower trim Connection to 45 cm coffee machine \*\* (optional) Connection to 45 cm coffee machine \*\* (optional) Narrow lower trim

# Induction 57 cm - 63 cm

#### **KM 6115**





- Appliance W x D\*: 57.4 x 50.4 cm
- Flat stainless steel frame
- EasyControls +
- 4 cooking zones
- Twin booster

### KM 6321 WaterBoost





- **Appliance W x D\*:** 62.6 x 52.6 cm
- Raised stainless steel frame
- DirectSelection controls
- 4 cooking zones
- WaterBoost
- Twin booster
- Stop & Go
- Con@ctivity

#### KM 6322 PowerFlex





- Appliance W x D\*: 61.4 x 51.4 cm
- Flat stainless steel rim
- DirectSelection controls
- 4 cooking zones including 1 PowerFlex zone
- Twin booster
- Stop & Go
- Con@ctivity

#### KM 6328 PowerFlex





- Appliance W x D\*: 62.6 x 52.6 cm
- Raised stainless steel frame
- DirectSelection Plus controls
- 4 cooking zones including 2 PowerFlex zones
- Twin boosters
- Stop & Go
- Recall function

# Induction 75 cm - 81 cm

#### **KM 6118**





- **Appliance W x D\*:** 76.4 x 50.4 cm
- Flat stainless steel frame
- EasyControls +
- 4 cooking zones
- Twin booster

#### KM 6347 PowerFlex





- Appliance W x D\*: 76.4 x 50.4 cm
- Flat stainless steel frame
- DirectSelection controls
- 4 cooking zones including
- 1 PowerFlex zone
- Twin booster Stop & Go
- Con@ctivity

# KM 6357 PowerFlex







- Appliance W x D\*: 80.6 x 52.6 cm
- Raised stainless steel frame
- DirectSelection Plus controls
- 4 cooking zones including 1 PowerFlex zone
- Twin booster
- Stop & Go
- Con@ctivity

#### KM 6358 PowerFlex





- Appliance W x D\*: 79.2 x 51.2 cm
- Flush fit
- DirectSelection Plus controls
- 4 cooking zones including 1 PowerFlex zone
- Twin booster
- Stop & Go
- Con@ctivity

#### KM 6366 PowerFlex





- Appliance W x D\*: 80.6 x 52.6 cm
- Raised stainless steel frame
- DirectSelection Plus controls
- 6 cooking zones including
- 3 PowerFlex zones
- Twin booster
- Stop & Go
- Recall function

\* Please refer to the Miele Built-in appliances brochure or www.miele.co.uk for full specifications and detailed building-in drawings and installation instructions.

# Induction 90 cm - 95 cm

#### KM 6379 PowerFlex





- **Appliance W x D\*:** 91.6 x 41.6 cm
- Bevelled glass edge all round
- Direct Selection Plus controls
- 4 cooking zones including 1 PowerFlex zone
- Twin booster
- Stop & Go
- Con@ctivity

#### KM 6386 PowerFlex





- **Appliance W x D\*:** 94.2 x 52.6 cm
- Raised stainless steel frame
- Direct Selection Plus controls
- 5 cooking zones including 1 PowerFlex zone
- Twin booster
- Stop & Go
- Con@ctivity

#### KM 6387 PowerFlex





- Appliance W x D\*: 92.8 x 51.2 cm
- Flush fit
- Direct Selection Plus controls
- 5 cooking zones including
   1 PowerFlex zone
- Twin booster
- Stop & Go
- Con@ctivity

# Ceramic 57 cm - 77 cm

# KM 520 HiLight



- Appliance W x D\*: 57.4 x 50.4 cm
- Flat stainless steel frame
- 4 cooking zones
- Onset dials

# KM 5600 HiLight



- Appliance W x D\*: 57.4 x 50.4 cm
- Flat stainless steel frame
- 4 cooking zones
- EasyControls

# KM 6200 ExtraSpeed





- Appliance W x D\*: 57.4 x 50.4 cm
- Flat stainless steel frame
- 4 cooking zones including 1 vario zone
- DirectSelection controls
- Stop & Go
- Con@ctivity

# KM 6204 ExtraSpeed









- Appliance W x D\*: 61.4 x 51.4 cm
- Flat stainless steel frame
- 4 cooking zones including 1 vario zone & 1 extended zone
- DirectSelection controls
- Stop & Go
- Con@ctivity

# KM 5617 HiLight



- **Appliance W x D\*:** 76.4 x 50.4 cm
- Flat stainless steel frame
- 4 cooking zones including 1 vario zone & 1 extended zone
- EasyControls+



# Gas<sup>†</sup> 65 cm - 90 cm

#### **KM 2010**





- **Appliance W x D\*:** 65.0 x 52.0 cm
- Stainless steel trough & frame
- Stainless steel look dial controls
- Electronic ignition
- 4 cooking zones

#### KM 2012

#### As KM 2010, plus:

• 4 cooking zones including 1 mono wok

#### KM 2032





- Appliance W x D\*: 75.0 x 52.0 cm
- Stainless steel trough & frame
- Stainless steel look dial controls
- Electronic ignition
- 5 cooking zones including 1 mono wok

#### **KM 2034**





- Appliance W x D\*: 75.0 x 52.0 cm
- Stainless steel trough & frame
- Stainless steel look dial controls
- Electronic ignition
- 5 cooking zones including 1 dual wok

#### **KM 2054**





- **Appliance W x D\*:** 90.0 x 52.0 cm
- Stainless steel trough & frame
- Stainless steel look dial controls
- Electronic ignition
- 5 cooking zones including 2 dual woks

#### KM 2354





- **Appliance W x D\*:** 88.8 x 50.8 cm
- Stainless steel trough & frame, flat fit
- Stainless steel dial controls
- Electronic ignition
- 5 cooking zones including 1 dual wok
- · Dishwasher proof pot rests

#### **KM 2357**





- Appliance W x D\*: 89.2 x 51.2 cm
- Stainless steel trough & frame, flush fit
- Stainless steel dial controls
- Quick start electronic ignition
- 5 cooking zones including 1 dual wok
- Dishwasher proof pot rests

# Gas on Glass† 62 cm - 95 cm

#### KM 3010





- Appliance W x D\*: 62.6 x 52.6 cm
- Onset stainless steel frame
- · Stainless steel dial controls
- Electronic ignition
- 4 cooking zones
- Dishwasher proof pot rests

### KM 3014





- Appliance W x D\*: 62.6 x 52.6 cm
- Onset stainless steel frame
- Stainless steel dial controls
- Electronic ignition
- 3 cooking zones including
- 1 dual wok
- Dishwasher proof pot rests

### **KM 3034**





- Appliance W x D\*: 80.6 x 52.6 cm
- Onset stainless steel frame
- · Stainless steel dial controls
- Quick start electronic ignition
- 5 cooking zones including
- 1 dual wok
- Dishwasher proof pot rests

#### KM 3054





- Onset stainless steel frame
- Stainless steel dial controls
- Quick start electronic ignition
- 1 dual wok





- **Appliance W x D\*:** 94.2 x 52.6 cm

- 5 cooking zones including
- Dishwasher proof pot rests

# CombiSets<sup>†</sup>

#### **CS 1012-1 G Gas Hob**





- Appliance W x D\*: 28.8 x 52 cm
- Stainless steel trough & frame
- Solid metal controls
- Rapid ignition
- 2 cooking zones

#### CS 1011 G Gas Wok





- Appliance W x D\*: 28.8 x 52 cm
- Stainless steel trough & frame
- Solid metal control
- Rapid ignition
- 1 dual wok cooking zone

#### CS 1212-1 i Induction Hob





- Appliance W x D\*: 28.8 x 52 cm
- Stainless steel frame
- Solid metal controls
- 2 cooking zones
- Twin booster

#### CS 1222-1 i Induction Hob





- Appliance W x D\*: 38 x 52 cm
- Stainless steel frame
- Solid metal controls
- 2 cooking zones including 1 extended zone
- Twin booster

#### CS 1223-1 i Induction Wok



Stainless steel frame

Solid metal controls

• 1 wok cooking zone

CT 400 P Tepan Plate

Wok pan

- Appliance W x D\*: 38 x 52 cm • Appliance W x D\*: 38 x 52 cm
  - - Solid metal controls
    - 2 cooking zones including 1 extended zone

CS 1122 E Ceramic Hob

# CS 1312 BG BBQ Grill



- Appliance W x D\*: 28.8 x 52 cm
- Stainless steel frame
- Solid metal controls
- 12 power settings
- 2 cooking zones
- Lava rocks
- Optional griddle

# CS 1411 F Fryer



- Appliance W x D\*: 28.8 x 52 cm
- Stainless steel frame
- Solid metal controls
- Temperature: 80°C to 200°C
- Frying insert
- Lid

# CS 1418 WA Weighing Scales



- Appliance W x D\*: 28.8 x 52 cm
- Tempered glass surface
- Sensor controls
- Imperial/metric weight display
- Tare function

# **Tepans**

# CS 1327 Y Tepan Yaki



- Appliance W x D\*: 38 x 52 cm
- Stainless steel frame & cooking surface
- Solid metal controls
- 2 cooking zones




- Tepan plate diameter: 57 cm
- 650 cm worktop depth required
  - Stainless steel cooking surface
  - Rotary control
  - Cooking area 40 cm diameter dips 1.8 cm in centre



CT 400 MP Mobile Tepan Plate

- Tepan plate diameter: 57 cm
- Mobile housing unit, stainless steel & multiplex ply
- Stainless steel cooking surface
- Rotary control
- Cooking area 40 cm diameter dips 1.8 cm in centre
- Stainless steel handles
- 4 castor wheels, lockable





# Slimline<sup>†</sup>

# **DA 3360**

#### **DA 3460**

#### **DA 3490**

#### DA 3590 Flush fit

#### **DAR 3000**





- Extraction & Recirculation\*
- 60 cm wide\*\*
- 150/320/430 m³/h extraction
- Noise level: 44/51/58 dB
- Halogen lighting





- Extraction & Recirculation\*
- 60 cm wide\*\*
- 150/400/550 m³/h extraction
- Noise level: 45/56/64 dB
- Halogen lighting





DA 3560 Flush fit



- Extraction & Recirculation\*
- 60 cm wide\*\*
- 200/400/640 m<sup>3</sup>/h extraction
- Noise level: 41/52/64 dB
- Dimmable halogen lighting
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity





- Extraction & Recirculation\*
- 90 cm wide\*\*
- 150/400/550 m³/h extraction
- Noise level: 45/56/64 dB
- Halogen lighting









- Extraction & Recirculation\*
- 90 cm wide\*\*
- 200/400/640 m³/h extraction
- Noise level: 41/52/64 dB
- Dimmable halogen lighting
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity



Drop down frame available as an accessory for full canopy integration when closed of DA 3360, DA 3460, DA 3490

# Integrated<sup>†</sup>

#### **DA 186**

#### **DA 2050**

#### **DA 2250**

#### **DA 2270**

### **DA 2210**





- Extraction & Recirculation\*
- 60 cm wide\*\*
- 200/400/560 m<sup>3</sup>/h extraction
- Noise level: 43/57/65 dB
- Halogen lighting
- Must be fitted with a kitchen furniture panel (not supplied)





- Extraction & Recirculation\*
- 50 cm wide\*\*
- 150/280/400 m<sup>3</sup>/h extraction
- Noise level: 42/55/65 dB
- Halogen lighting
- 3 power settings





- Extraction & Recirculation\*
- 50 cm wide\*\*
- 200/400/640 m³/h extraction
- Noise level: 43/53/65 dB
- Dimmable halogen lighting
- Fan run-on function
- · Check grease / charcoal filter LED





- Extraction & Recirculation\*
- 70 cm wide\*\*
- 200/400/640 m³/h extraction
- Noise level: 43/53/65 dB
- Dimmable halogen lighting
- Fan run-on function
- Check grease / charcoal filter LED





- Extraction & Recirculation\*
- 110 cm wide\*\*
- 2 x 650/1250/1850 m<sup>3</sup>/h extraction
- Noise level: 51/64/77 dB
- Dimmable halogen lighting
- Fan run-on function
- Check grease / charcoal filter LED



### Wall Décort

# **DA 396-5**



- Extraction & Recirculation\*
- 60 cm wide\*\*
- 150/350/500 m<sup>3</sup>/h extraction
- Noise level: 41/53/61 dB
- Halogen lighting
- · Special build available to order

#### **DA 5960 W**



- Extraction & Recirculation\*
- 60 cm wide\*\*
- 150/360/530 m³/h extraction
- Noise level: 44/60/69 dB
- Halogen lighting
- Special build available to order

#### DA 399-5



- Extraction & Recirculation\*
- 90 cm wide\*\*
- 150/350/500 m³/h extraction
- Noise level: 41/53/61 dB
- Halogen lighting
- Special build available to order

### **DA 5990 W**





- Extraction & Recirculation\*
- 90 cm wide\*\*
- 150/360/530 m<sup>3</sup>/h extraction
- Noise level: 44/60/69 dB
- Halogen lighting
- Special build available to order

#### **DA 5495 W**





- Extraction & Recirculation\*
- 90 cm wide\*\*
- 150/350/500 m<sup>3</sup>/h extraction
- Noise level: 41/53/61 dB
- Halogen lighting
- Special build available to order

# **DA 289-4 (+ EXT)**







- Extraction only
- 90 cm wide\*\*
- 200/400/640 m<sup>3</sup>/h extraction
- Noise level: 39/52/63 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- Check grease filter LED
- Con@ctivity
- Available with external motor
- Headroom free canopy

# **DA** 489-4 (+ EXT)



- Extraction & Recirculation\*
- 90 cm wide\*\*
- 200/400/640 m<sup>3</sup>/h extraction
- Noise level: 39/52/64 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- · Check grease / charcoal filter LED
- Con@ctivity
- Available with external motor
- Headroom free canopy

#### **DA 419-4**





- Extraction & Recirculation\*
- 90 cm wide
- 150/350/500 m³/h extraction
- Noise level: 41/53/61 dB
- Dimmable halogen lighting

# **DA 249-4 (+ EXT)**





- Extraction & Recirculation\*
- 90 cm wide\*\*
- 200/400/640 m<sup>3</sup>/h extraction
- Noise level: 41/55/66 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity
- Available with external motor

# DA 5294 W (+ EXT)





- Extraction & Recirculation\*
- 90 cm wide\*\*
- 200/400/640 m³/h extraction
- Noise level: 40/53/65 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity
- Available with external motor

# **DA 6290 W Lumen (+ EXT)**





- Extraction & Recirculation\*
- 90 cm wide\*\*
- 200/400/640 m³/h extraction
- Noise level :41/55/66 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity
- Available with external motor
- Glass edge feature LED lighting

# **DA 7090 W Aura**





- Recirculation only
- 90 cm wide\*\*
- 180/360/550 m³/h extraction
- Noise level: 56/69/78 dB
- Dimmable halogen lighting
- Floating design: white canopy with black glass
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity
- Glass touch controls



### Wall Décort

### **DA 6690 W**



- Colour: clst
- Extraction & Recirculation\*
- 90 cm wide\*\*
- 200/400/640 m³/h extraction
- LED lighting
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity 2.0
- · Available with external motor
- Power management system

#### DA 422-4 (+ EXT)



- Extraction only
- 120 cm wide\*\*
- 200/400/640 m³/h extraction
- Noise level: 40/53/65 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- Check grease filter LED
- Con@ctivity
- Available with external motor

# Ceiling Hood<sup>†</sup>

#### **DA 2900 (+ EXT)**










- Extraction & Recirculation\*
- 110 cm wide\*\*
- 190/390/620 m<sup>3</sup>/h extraction
- Noise level: 42/54/67 dB
- Ceiling installation with remote control operation
- LED lighting
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity
- Glass or stainless steel décor panels required
- Energy efficent DC motor
- Available with external motor

# Island Décor†

#### **DA 420 V (+ EXT)**








- Extraction & Recirculation\*
- 90 cm wide\*\*
- 200/480/700 m<sup>3</sup>/h extraction
- Noise level: 42/59/67 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- · Check grease / charcoal filter LED
- Con@ctivity
- Available with external motor
- Motorised variable height

# **DA 6290 D Lumen (+ EXT)**







- Extraction only
- 90 cm wide\*\*
- 200/480/700 m<sup>3</sup>/h extraction
- Noise level: 42/59/67 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- Check grease filter LED
- Con@ctivity
- Available with external motor
- Glass edge feature LED lighting

# **DA 6690 D**





- Colour: clst
- Extraction only
- 90 cm wide\*\*
- 200/400/640 m³/h extraction
- LED lighting
- Fan run-on function
- Check grease filter LED
- Con@ctivity 2.0
- Available with external motor
- Power management system

# **DA 5100 D (+ EXT)**





- Extraction only
- 100 cm wide\*3
- 160/450/620 m<sup>3</sup>/h extraction
- Noise level: 43/61/69 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function
- Check grease filter LED
- Con@ctivity
- Available with external motor

# DA 7000 D Aura





- Recirculation only
- 100 cm wide\*\*
- 250/500/600 m<sup>3</sup>/h extraction
- Noise level: 55/67/70 dB
- Dimmable halogen lighting
- Floating design: white canopy with black glass
- Fan run-on function
- Check grease / charcoal filter LED
- Con@ctivity
- Glass touch controls

# **DA 424 V** (+ EXT)



- Extraction only
- 120 cm wide\*\*
- 200/480/700 m<sup>3</sup>/h extraction
- Noise level: 42/59/67 dB
- Dimmable halogen lighting
- Special build available to order
- Fan run-on function Check grease filter LED
- Con@ctivity
- Available with external motor
- Motorised variable height



# Fridges

#### K 9122 Ui







- **Appliance H x W\*:** 82 x 60 cm
- Door hinged right / convertible
- 137 litre net capacity
- Pair up F 9122 Ui-1

### K 9124 UiF





- Appliance H x W\*: 81.8 x 59.7 cm
- Door hinged right / convertible
- 98 litre net capacity plus 16 litre freezer compartment
- Pair up F 9122 Ui-1

### K 32122 i





- Appliance H x W\*: 87.2 x 54 cm
- Sliding door hinges right / convertible
- 154 litre net capacity

### K 35222 iD





- Appliance H x W\*: 139.5 x 55.9 cm
- Door hinged right / convertible
- 259 litre net capacity
- Pair up F 9552 i
- Dynamic cooling

#### K 35272 iD





- Appliance H x W\*: 139.5 x 55.9 cm
- Door hinged right / convertible
- 236 litre net capacity
- Pair up F 9552 i
- Dynamic cooling PerfectFresh drawers

### K 37222 iD





- **Appliance H x W\*:** 177 x 55.9 cm
- Door hinged right / convertible
- 334 litre net capacity
- Pair up FN 9752 i
- Dynamic cooling

#### K 37272 iD





- **Appliance H x W\*:** 177 x 55.9 cm
- Door hinged right / convertible
- 308 litre net capacity
- Pair up FN 9752 i Dynamic cooling
- PerfectFresh drawers

### K 37472 iD





- **Appliance H x W\*:** 177 x 55.9 cm
- Door hinged right / convertible
- 308 litre net capacity
- Pair up FN 9752 i
- FlexiLight





- Dynamic cooling
- PerfectFresh drawers

<sup>\*</sup> Please refer to the Miele Built-in appliances brochure or www.miele.co.uk for full specifications and detailed building-in drawings and installation instructions.

#### Freezers

### F 9122 Ui-1





- **Appliance H x W\*:** 82 x 60 cm
- Door hinged right / convertible
- 97 litre net capacity
- Pair up K 9122 Ui, K 9124 UiF
- SoftClose

# F 9212 i





- Appliance H x W\*: 87.2 x 54 cm
- Sliding door hinges / right convertible
- 104 litre net capacity

### F 9552 i





- Appliance H x W\*: 139.7 x 55.7 cm
- Door hinged right / convertible
- 186 litre net capacity
- Pair up K 35222 iD, K 35272 iD
- SoftClose

#### FN 9752 i





- **Appliance H x W\*:** 177.2 x 55.7 cm
- Door hinged right / convertible
- 211 litre net capacity
- Pair up K 37222 iD, K 37272 iD, K 37472 iD
- SoftClose
- Frost free

# Fridge Freezers

# **KDN 37132 iD**





- **Appliance H x W\*:** 177 x 54 cm
- Sliding door hinges right / convertible
- 262 litre net capacity
- Frost free
- Dynamic cooling

### **KDN 37232 iD**







- **Appliance H x W\*:** 177 x 55.9 cm
- Door hinged right / convertible
- 262 litre net capacity
- Frost free
- Dynamic cooling

#### KFN 37432 iD







- **Appliance H x W\*:** 177 x 55.9 cm
- Door hinged right / convertible
- 261 litre net capacity
- Frost free
- Dynamic cooling
- FlexiLight

#### KFN 37452 iDE







- **Appliance H x W\*:** 177 x 55.9 cm
- Door hinged right / convertible
- 256 litre net capacity
- Frost free
- Dynamic cooling
- FlexiLight
- Mylce Maker (no plumbing required)

#### KFN 37682 iD





- **Appliance H x W\*:** 177 x 55.9 cm
- Door hinged right / convertible
- 242 litre net capacity
- Frost free
- Dynamic cooling
- FlexiLight
- PerfectFresh Pro



# Built-In

# KWT 4154 UG-1









- Appliance H x W\*: 82 x 60 cm
- Door hinged right / convertible
- 126 litre net capacity
- 2 independently controlled zones
- Stores 38 x 0.75l Bordeaux bottles
- Dynamic cooling

Stores 178 x 0.75l

Dynamic cooling

Tinted, tempered

glass door

Bordeaux bottles

Active air clean filter

Active air clean filter

# Freestanding

# **KWT 6831 SG ed**









- Appliance H x W\*: 192 x 70 cm
- Door hinged right / convertible
- 505 litre net capacity
- 3 independently controlled zones

**KWT 6832 SGS ed** 










- Door hinged right / convertible
- 505 litre net capacity
- 3 independently controlled zones



- Bordeaux bottles
- Dynamic cooling
- Active air clean filter Tinted, tempered
- glass door SommelierSet





# Semi Integrated

#### G 4210 i





- Appliance H x W\*: 80.5 x 60 cm
- Fascia panel: clst, white, dark brown, black
- 13 place settings
- Cutlery basket
- 5 programmes
- Delay start
- Time left display
- Turbo option
- SoftClose
- AutoSensor
- 13 22 litres water 1)

#### G 5220 SCi





- Appliance H x W\*: 80.5 x 60 cm
- Fascia panel: clst, white, dark brown, black
- 14 place settings
- Cutlery tray
- 6 programmes
- Delay start
- Time left display
- Turbo option
- SoftClose
- AutoSensor
- 10 17 litres water 1)

#### G 5400 SCi





- Appliance H x W\*: 80.5 x 60 cm
- Fascia panel: clst, white, dark brown, black
- 14 place settings
- 3D cutlery tray
- 6 programmes Delay start
- Time left display
- Turbo option
- SoftClose
- AutoSensor
- 10 17 litres water 1)

#### **G 5625 SCi XXL**



- Appliance H x W\*: 84.5 x 60 cm
- Fascia panel: clst, white, black
- 14 place settings
- 3D cutlery tray
- 6 programmes Delay start
- Time left display
- Turbo option
- SoftClose
- AutoSensor
- 7 17 litres water 1)
- Intensive lower basket option
- In door salt container
- Sensor dry, load recognition
- Auto open drying
- Extra quiet programme 40 dB (A)

### **G 5935 SCi XXL**





- Appliance H x W\*: 84.5 x 60 cm
- Fascia panel: clst only
- 14 place settings
- 3D cutlery tray
- 16 programmes
- Delay start
- Time left display
- Turbo option
- SoftClose
- AutoSensor
- 7 17 litres water 1)
- Intensive lower basket option
- In door salt container
- Sensor dry, load recognition
- Auto open drying
- Extra quiet programme 38 dB (A)
- BrilliantLight



# Slimline Semi Integrated

# G 4501 SCi





- **Appliance H x W\*:** 80.5 x 45 cm
- Fascia panel: clst, white
- 9 place settings
- Cutlery tray
- 5 programmes
- Delay start
- Time left display
- Turbo option
- SoftClose
- AutoSensor
- 11 18 litres water 1)

\* Please refer to the Miele Built-in appliances brochure or www.miele.co.uk for full specifications and detailed building-in drawings and installation instructions.

1) In accordance with EN 50242 in the Sensor Wash or Energy Save Programme (depending on model). Sound emissions in accordance with the new EU energy label.

# Fully Integrated

#### G 4280 Vi G 5280 SCVi G 5470 SCVi G 5685 SCVi XXL G 5885 SCVi XXL G 5985 SCVi XXL



- Appliance H x W\*: 80.5 x 60 cm
- 13 place settings
- Cutlery basket
- 5 programmes
- Delay start
- Programme duration
- Turbo option
- SoftClose
- Auto sensor
- 13 22 litres water 1)



- Appliance H x W\*: 80.5 x 60 cm
- 14 place settings
- Cutlery tray
- 6 programmes
- Delay start
- Programme duration
- Turbo option
- SoftClose
- Auto sensor
- 10 17 litres water 1)



- Appliance H x W\*: 80.5 x 60 cm
- 14 place settings
- 3D cutlery tray
- 6 programmes
- Delay start
- Programme duration
- Turbo option
- SoftClose
- Auto sensor
- 10 17 litres water 1)



- Appliance H x W\*: 84.5 x 60 cm
- 14 place settings
- 3D cutlery tray
- 6 programmes
- Delay start
- Programme duration
- Turbo option
- SoftClose
- Auto sensor
- 7 17 litres water 1)
- Intensive lower basket option
- In door salt container
- Sensor dry, load recognition
- Auto open drying
- Extra quiet programme 40 dB (A)





14 place settings

Programme duration

7 - 17 litres water 1)

Auto open drying

BrilliantLight

In door salt container

Intensive lower basket option

Sensor dry, load recognition

Extra quiet programme - 38 dB (A)

3D cutlery tray

• 6 programmes

Delay start

Turbo option

Auto sensor

SoftClose





• Appliance H x W\*: 84.5 x 60 cm















- Appliance H x W\*: 84.5 x 60 cm
- 14 place settings
- 3D cutlery tray
- 16 programmes
- Delay start
- Programme duration
- Turbo option
- SoftClose
- Auto sensor
- 7 17 litres water 1)
- Intensive lower basket option
- In door salt container
- Sensor dry, load recognition
- Auto open drying


- Extra quiet programme 38 dB (A)
- BrilliantLight

# Slimline Fully Integrated

# G 4570 SCVi



- Appliance H x W\*: 80.5 x 45 cm
- 9 place settings





<sup>\*</sup> Please refer to the Miele Built-in appliances brochure or www.miele.co.uk for full specifications and detailed building-in drawings and installation instructions. 1) In accordance with EN 50242 in the Sensor Wash or Energy Save Programme (depending on model). Sound emissions in accordance with the new EU energy label.

# Integrated Washing Machines

# W 2819 i



- Appliance H x W\*: 82 x 60 cm
- Right hand hinged
- Lotus white fascia panel
   AutoClean



- 1400 rpm max spin speed
- Time left + Delay start
- 5.5 kg honeycomb drum Extra Quiet
- Slimline LCD display

#### W 2859 i WPM





- Appliance H x W\*: 82 x 60 cm
- Right hand hinged Stainless steel fascia
- panel 5.5 kg honeycomb drum • Extra Quiet Supertronic controls
- with LCD display
- 1600 rpm max spin speed
- Time left + Delay start
- AutoClean

# Integrated Washer Dryer

### **WT 2789 i WPM**





- Appliance H x W\*: 82 x 60 cm
- Right hand hinged White or stainless steel fascia panel
- 5.5 kg honeycomb drum 3 kg drying capacity
- Plus LCD display
- 1600 rpm max spin speed
- Time left + Delay start
- AutoClean
- Stains option

# Integrated Tumble Dryers

# T 4819 Ci







PerfectDry

- Appliance H x W\*: 82 x 60 cm
- Left hand hinged Lotus white fascia panel
- 6 kg honeycomb drum
- Condenser

# T 4859 Ci







- Appliance H x W\*: 82 x 60 cm
- Time left + Delay start Left hand hinged
  - Stainless steel fascia panel
  - 6 kg honeycomb drum
- Condenser
- Supertronic controls with LCD display
- PerfectDry
- Time left + Delay start











Miele Company Ltd Experience Centre Fairacres, Marcham Road, Abingdon, Oxon OX14 1TW Tel. 0845 365 0555

London Gallery 15/19 Cavendish Place London W1G OQE Tel. 0845 365 6610

www.miele.co.uk

Every effort has been made to ensure that the information given in this brochure is correct at the time of printing. However, due to continuous product improvement, Miele reserves the right to make changes to products and technical data without prior notice.

The images, logos, names and trading marks used in this brochure to identify Miele, our products and services are our proprietary marks whether registered or unregistered. These may only be used with the express permission of Miele.



GB M.-Nr. 98028596 Alteration rights reserved 05/13